




SILBUS Transmission System

Temperature and Vibration Monitoring

Both remote temperature and vibration monitoring can now be easily achieved by using SILBUS (2 wire) system and can be interfaced directly into your existing PLC (Data Lighting) network system.

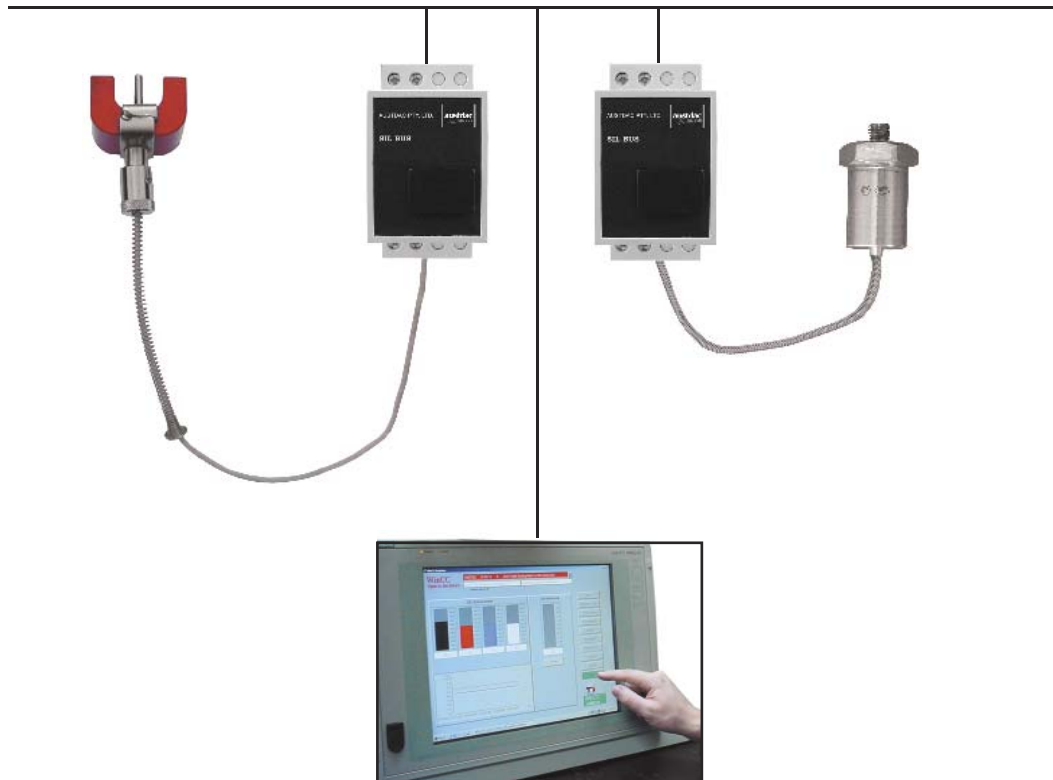

Main Features:

- Magnetic mounting system allows non intrusive connection of RTD temperature sensor to bearing housing.
- Spring loaded RTD sensor ensures solid connection to machine housing.
- RTD temperature sensor directly connects into a SILBUS temperature transmitter for transmission over 2 wires.
- Vibration sensing connected to same SILBUS installation.
- Now an easily installed robust temperature sensing system for temperature sensing on long distance applications.

Mine Monitoring

AUSTDAC PTY. LTD.

A.B.N. 31 002 654 695